

RL8

RO Membrane Housing
(Low Pressure Type)



Design P.	300psi
Design T.	100
Max Operating P.	300psi
Operating T.	75

Features

1. RL8" Membrane Shell.
2. Efficient filtering with High flow velocity.
3. Tightly seal of top&bottom cover and shell.
4. Strong consistency of RL8 menbrancand allows for excellent duralibiltye.


Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treament
High temperature manufacturing processes	Electronic Industry

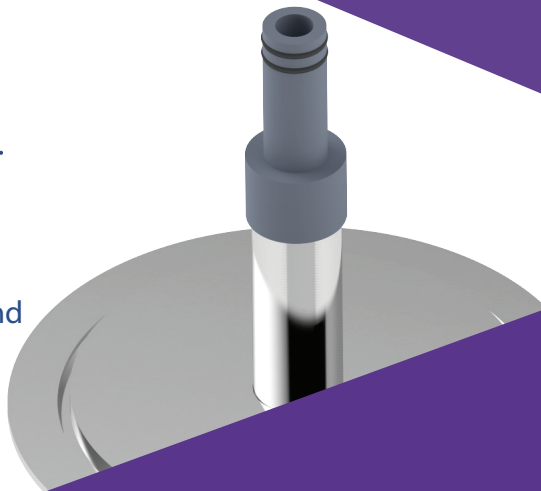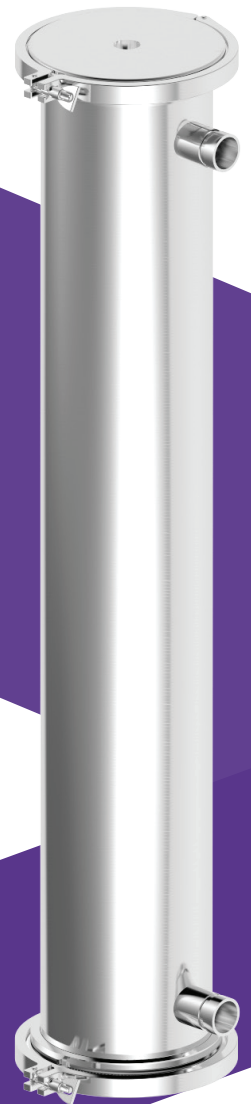

RL8 Ordering Guide

RL8	4	4	1	PF	1	V	E	BA
Model	Length	Shell Matrial	N1 Size	N1 Type	N2 Size	N2 Type	O-ring	Outside / Inside Finishes
RL8	4-40" 8-80" 12-120" 16-160" 20-200"	4-304 6-316	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Adapter C-CLAMP	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Adapter C-CLAMP	E-EPDM N-NBR V-VITON	B-Burnishing A-Acid pickling P-Polishing

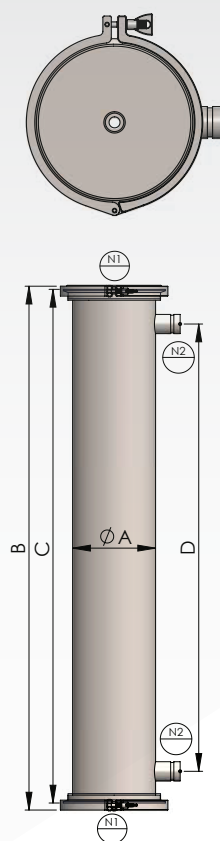

RL8 Specifications

Model	A m/m	B m/m	C m/m	N1	N2	Weight
RL8-4	Ø210	1328	1300	1"	1-1/2"	31kg
RL8-8	Ø210	2344	2316	1"	1-1/2"	47kg
RL8-12	Ø210	3360	3332	1"	1-1/2"	63kg
RL8-16	Ø210	4376	4348	1"	1-1/2"	78kg
RL8-20	Ø210	5392	5364	1"	1-1/2"	94kg