

HA

Household Filter Cartridge Housing (Standard Type)

Design P.	150psi
Design T.	75
Max Operating P.	50psi
Operating T.	40


Features

1. Easy maintainance for family use
2. SUS304 clamp closure and heavy-duty gasket improves sealing and reduces product loss.
3. High-thickness rubber Oring allows for easy installation and resistance of spillage.
4. Thick and solid top cover provides excellent durability.




Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treament
High temperature manufacturing processes	Electronic Industry

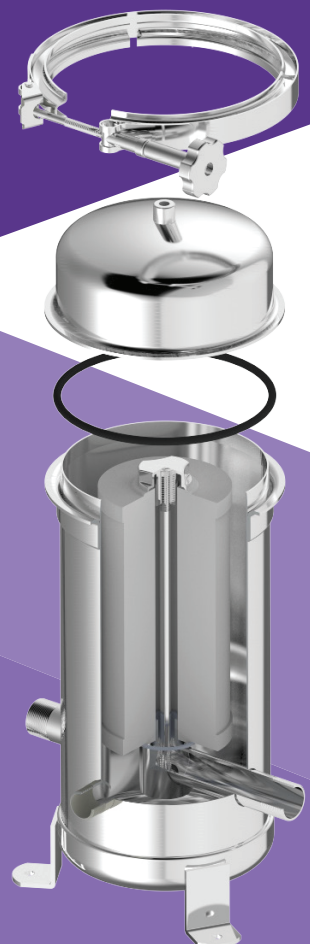

HA Ordering Guide

HA	1	4	F	1	PF	E	EA
Model	Length	Material	Adapters	Connection Size	Connection Type	O-ring	Outside / Inside Finishing
HA	1-10" 2-20"	4-304	F-DOE 5-222	1-1"	PF-PTF NF-NPTF PM-PTM NM-NPTM	E-EPDM N-NBR V-VITON S-Silicon TS-TEFLON +SILICON	A-Acid-pickling E-Electropolishing P-Polishing

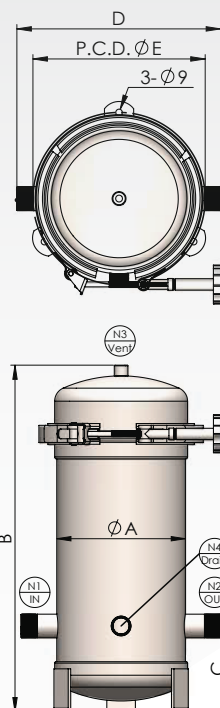

HA Specifications

Model	Length	A m/m	B m/m	C m/m	D m/m	E(PCD) m/m	Weight
HA1	10"	Ø180	445	120	280	Ø236	8kg
HA2	20"	Ø180	695	120	280	Ø236	9.7kg